




## CONVERSION INFORMATION

Smartfloor Revolution



**Ford Transit Custom | Volkswagen Transporter/Caravelle**

**SMARTFLOOR**  
Revolution

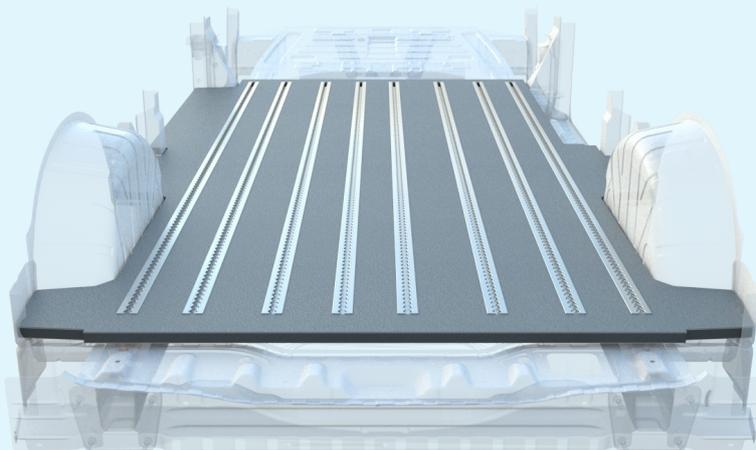

SMARTFLOOR B.V. | Bedrijvenpark Twente 415 | 7602 KM Almelo  
Tel. +31 546 45 55 65 | [www.smartfloor.nl](http://www.smartfloor.nl)

Member of  
AMF-Brunns group



## Vehicle information

Type code: Ford: NXN/ NRN  
Volkswagen: NSN/NVN  
Length: L1/L2

Commercial name: Tourneo Custom/ Transit Custom  
Transporter/Transporter Caravelle  
Tested: R14, R16,R17, R14S  
Category: M1,N1


## Smartfloor Revolution - Possibilities

- 1 The minimum possible rail length is 1 meter.
- 2 Rail has a minimal offset distance of 50mm to the back of the floor.
- 3 Rail has a minimal offset distance of 50mm to the front of the floor.
- 4 Rail has a minimal distance of 42,5mm from center Rail to wheelarch contour.
- 5 The minimal center to center distance between rails is 85mm (156mm for mounting seats).
- 6 Alu profiles are always positioned in the travel direction.
- 7 The SF Revo floor-sheet must be installed over the entire width and length of the vehicle floor.



### ATTENTION:

- Only use a maximum of two Sliding Rotating V-legs on one seat row.
- An unique alu mounting strips kit must be used.
- Use Lock Plates for mounting when using our standard seats and legs. It is allowed to use our U-profile instead of Lock Plates.
- When using a Smartbench:  
Do not use Lock Plates on the back of the floor!  
Use a U-profile with a length of 1080mm.
- It is allowed to mount the Smartseats in the opposite travel direction, without the use of Lock Plates at the front side of the floor.

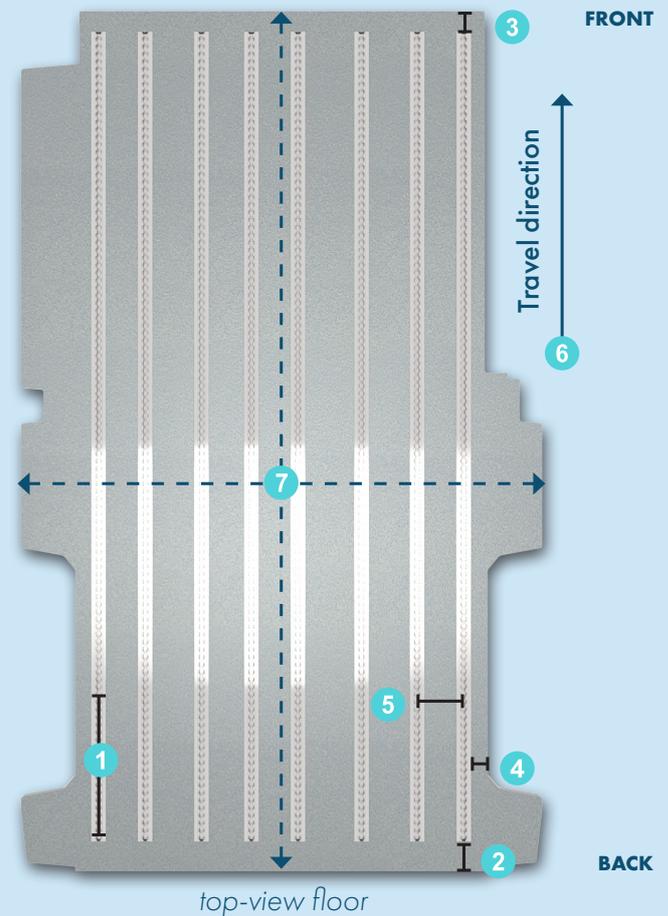

## Tested seats and legs

### Smartseats

Smartseat Easy  
Smartseat Easy XL  
Smartseat Easy Reclining  
Smartseat Easy Reclining XL  
Smartseat Care RV  
SAF 42  
SAF 43



### Smartlegs

Smartleg 290  
Smartleg 290 WW  
Smartleg 290 WW USA

### Smartlegs Alu

Smartleg Alu 290  
Smartleg Alu 290 WW  
Smartleg Alu 290 WW USA

### V-legs

Sliding Rotating V-leg 170\_156/173  
Sliding Rotating V-leg 190\_156/173  
Sliding Rotating V-leg 230\_156/173  
Sliding Rotating V-leg 260\_156/173  
Sliding V-leg 230\_156/173  
Sliding V-leg 260\_156/173  
Sliding V-leg 290\_156/173

### Fixed legs

Fixed leg 235/290 TN

### NMI Milleniumleg

NMI Milleniumleg 235  
NMI Milleniumleg 235 Double Spigot